



REL NO	LTR	NO	REVISION	DWN	CHKD	APVD	DATE
ECO-XXXXX	A	1	PRODUCTION RELEASE	SP	KB	A_MEHTA	10AUG11

- NOTES:
- ENCLOSURE OUTLINE WITH STANDARD SKID.
 - ENCLOSED GENERATOR SET LIFT ONLY BY SINGLE POINT LIFTING EYE OR BY FORK LIFT FORKS UNDER BEDFRAME.

WEIGHT DATA					
S/N	GENSET NOMENCLATURE	ENCLOSED GENSET DRY WEIGHT (KG)		ENCLOSED GENSET WET WEIGHT (KG)	
		WITH EBS	WITHOUT EBS	WITH EBS	WITHOUT EBS
1	S3.8 + UC 224 C	1397.2	1392.2	1529.2	1524.2
2	S3.8 + UC 224 D	1410.2	1405.2	1542.2	1537.2
3	S3.8 + UC 224 E	1437.2	1432.2	1569.2	1564.2
4	S3.8 + UC 224 F	1457.2	1452.2	1589.2	1584.2
5	S3.8 + UC 224 G	1507.2	1502.2	1639.2	1634.2

TORQUE TABLE				
PART NO.	SIZE	GRADE	TORQUE (N-M)	DESCRIPTION
0403_7164	M24 X 3	8.8	657-803	EYE BOLT

DRAFT

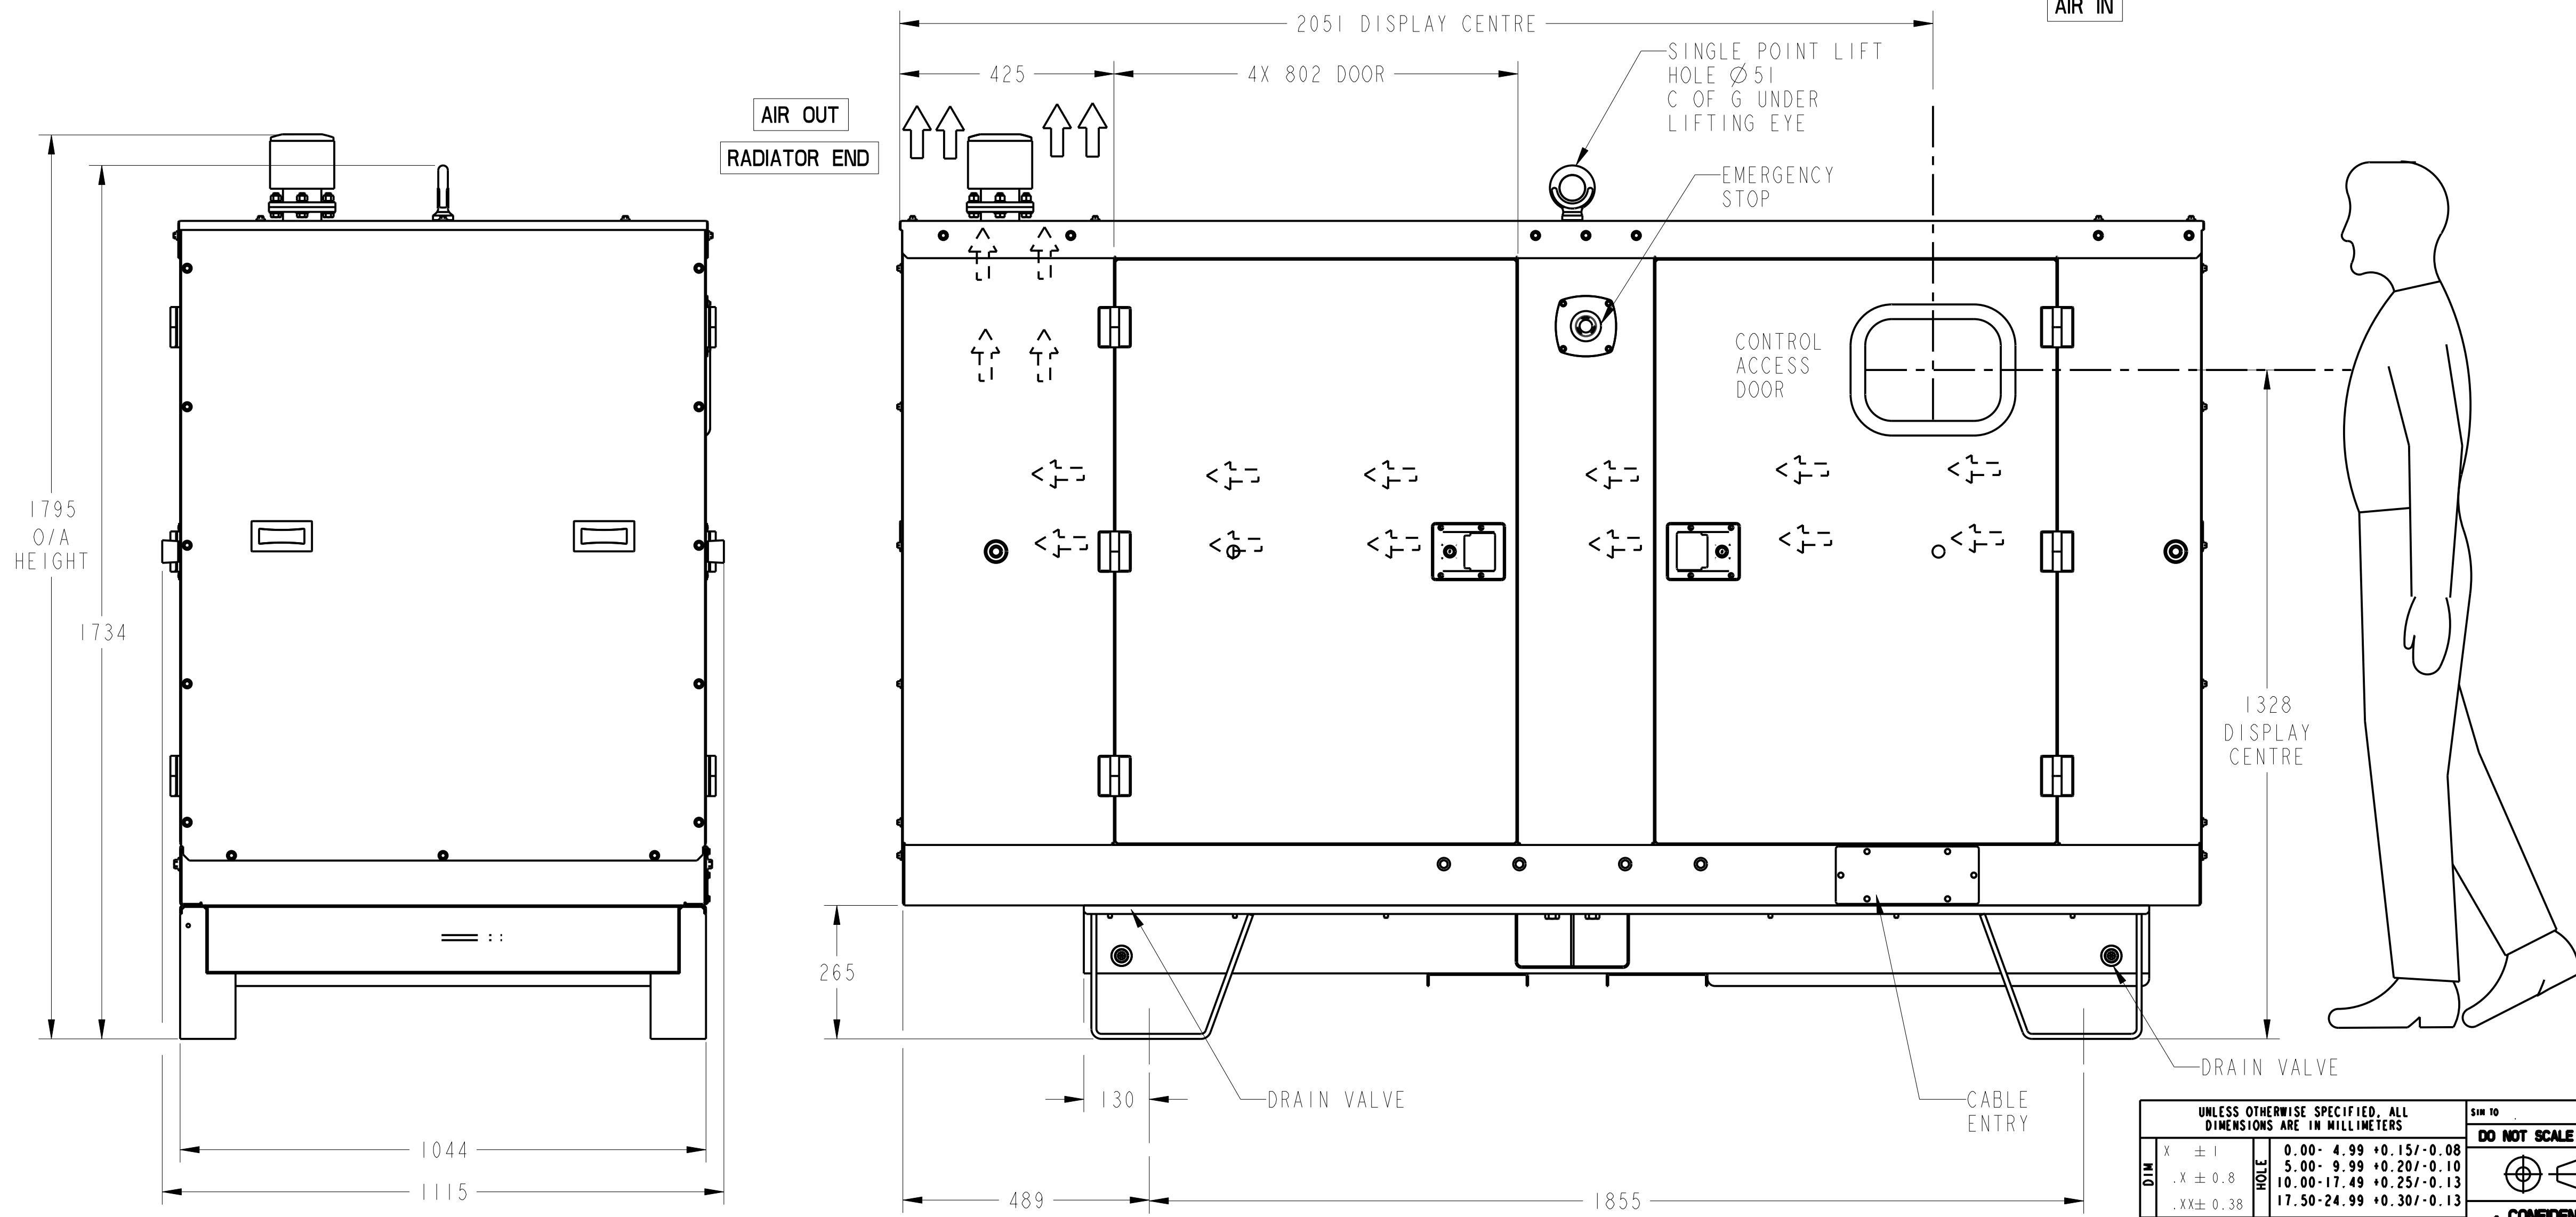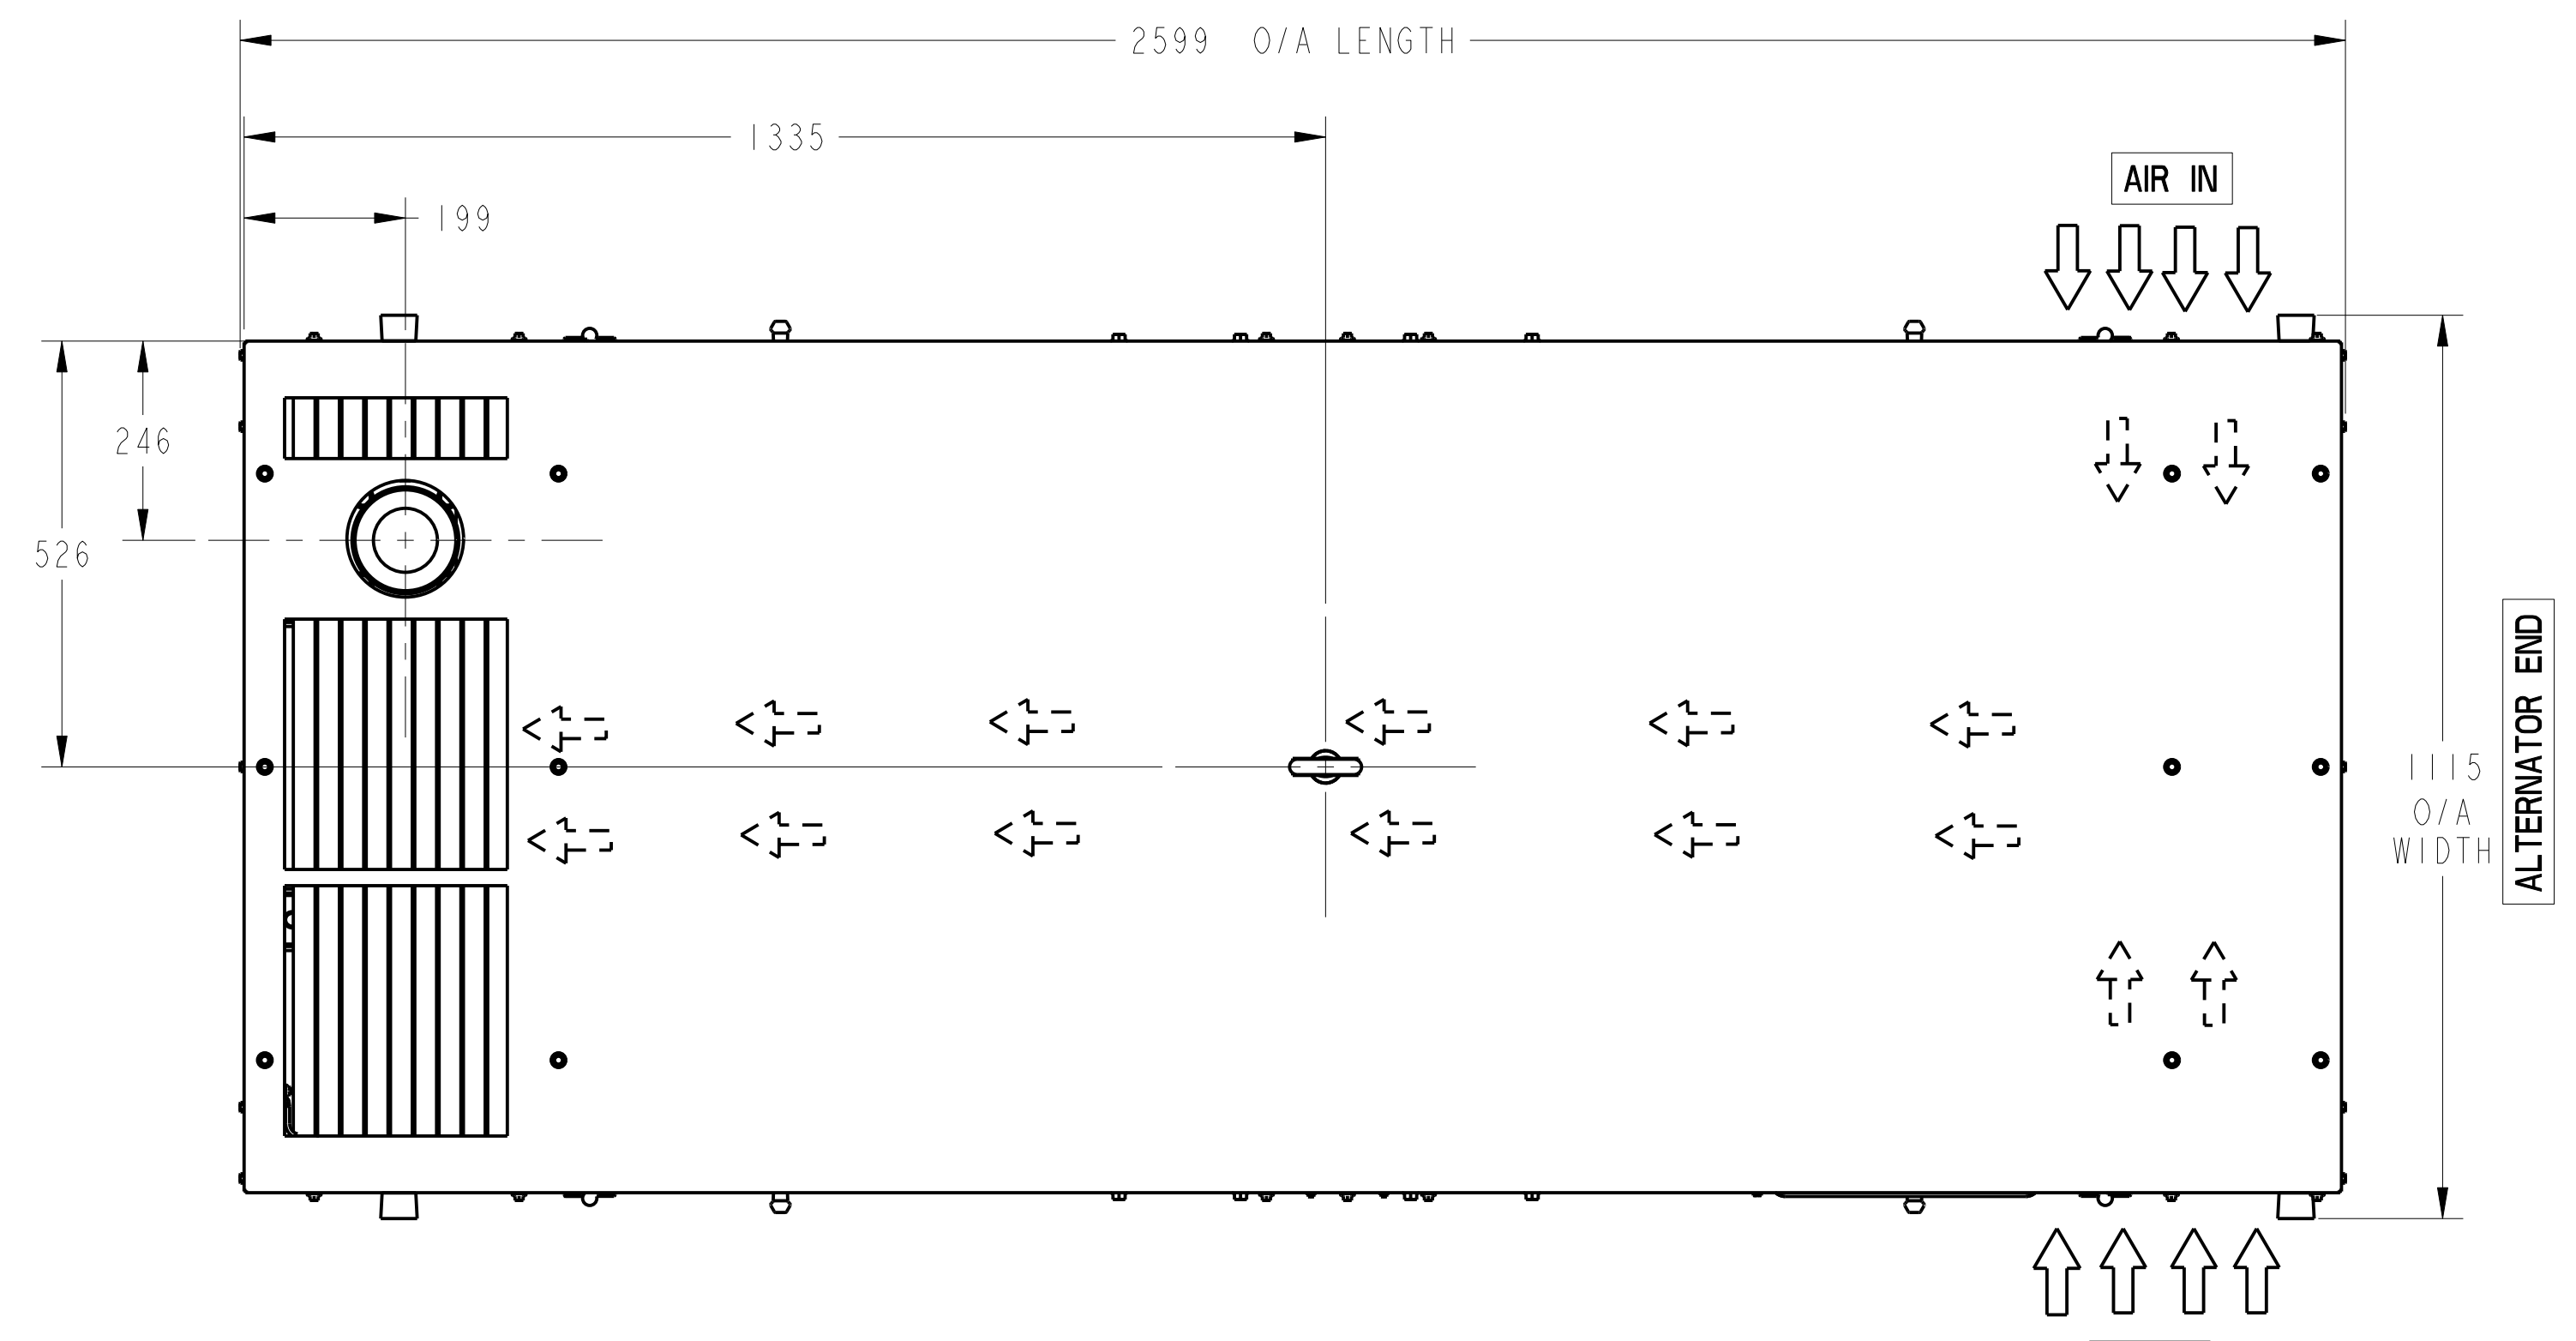

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS		SHR 10	DWN S_PATIL		CUMMINS POWER GENERATION	
DO NOT SCALE PRINT		CRD K_BANU	APVD A_MEHTA		OUTLINE, ENCLOSURE	
DATE 10AUG11		SITE CODE		C I L		
ANG TOL: ± 1.0°		SCALE: 1/32	PROPERTY OF CUMMINS POWER GENERATION GROUP		SHEET 1 of 1	
FOR INTERPRETATION OF DIMENSIONING AND TOLERANCING, SEE ASME Y14.5M-1994		FIRST USED ON S3.8 INTL SPEC		A040U986		